


## DIN 371 HSS-Co Blinde Machinetap, Metrisch (te gebruiken voor STAAL)



60°, verdikte schacht, Spiraalhoek 35°, voor blinde gaten,  
aansnijding 2-5 gangen, spaanhoek 14-16

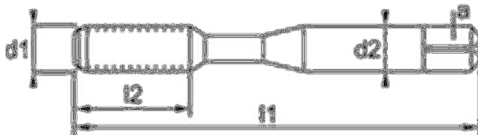

Artikelnr.	d1	P	l1	l2	d2	a	Artikelnr.	d1	P	l1	l2	d2	a
23.295.0200	2	0,4	45	6	2,8	2,1	23.295.0600	6	1	80	10	6	4,9
23.295.0300	3	0,5	56	5	3,5	2,7	23.295.0800	8	1,25	90	13	8	6,2
23.295.0400	4	0,7	63	7	4,5	3,4	23.295.1000	10	1,5	100	15	10	8
23.295.0500	5	0,8	70	8	6	4,9							

Te tappen schroefdraad	Spoed	Diameter voor te boren
3	0.5	2.5
4	0.7	3.3
5	0.8	4.2
6	1	5
8	1.25	6.8
10	1.5	8.5
12	1.75	10.2
14	2	12
16	2	14
18	2.5	15.5
20	2.5	17.5
22	2.5	19.5
24	3	21
27	3	24
30	3.5	26.5

Bekijk de scherpe prijzen van [WWW.TECHWINKEL.NL](http://WWW.TECHWINKEL.NL)  
Wanneer u zich als bedrijf registreert op onze site, krijgt u nog eens 35% korting!