


## DIN 376 HSS-Co Blinde Machinetap, Metrisch (te gebruiken voor STAAL)



60°, dunne schacht, Spiraalhoek 35°, voor blinde gaten,  
aansnijding 2-5 gangen, spaanhoek 14-16

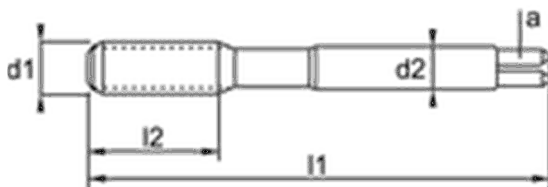

Artikelnr.	d1	P	l1	l2	d2	a	Artikelnr.	d1	P	l1	l2	d2	a
23.296.1000	10	1,5	100	15	7	5,5	23.296.2000	20	2,5	140	25	16	12
23.296.1200	12	1,75	110	18	9	7	23.296.2200	22	2,5	140	25	18	14,5
23.296.1400	14	2	110	20	11	9	23.296.2400	24	3	160	30	18	14,5
23.296.1600	16	2	110	20	12	9							

Te tappen schroefdraad	Spood	Diameter voor te boren
3	0.5	2.5
4	0.7	3.3
5	0.8	4.2
6	1	5
8	1.25	6.8
10	1.5	8.5
12	1.75	10.2
14	2	12
16	2	14
18	2.5	15.5
20	2.5	17.5
22	2.5	19.5
24	3	21
27	3	24
30	3.5	26.5

Bekijk de scherpe prijzen van [WWW.TECHWINKEL.NL](http://WWW.TECHWINKEL.NL)  
Wanneer u zich als bedrijf registreert op onze site, krijgt u nog eens 35% korting!