


DIN 603/555 SLOTBOUT MET ZESKANTMOER - STAAL ELEKTROLYTISCH VERZINKT

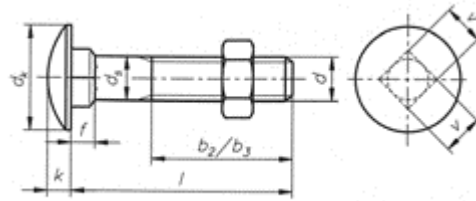

d	M5	M6	M8	M10	M12	M16
b = L < 125mm	16	18	22	26	30	38
b1 = L 125-200mm	22	24	28	32	36	44
b2 = L > 200mm	-	-	41	45	49	57
dk	13.55	16.55	20.65	24.65	30.65	38.8
f	4.1	4.6	5.6	6.6	8.75	12.9
k	3.3	3.88	4.88	5.38	6.95	8.95
v	5.48	6.48	8.58	10.58	12.7	16.7

b : minimale schroefdraadlengte b1 : L ≤ 125mm b2 : 125mm < L ≤ 200mm b3 : L > 200mm