


## DIN 6798a VLAKKE TANDVEERRING MET GESLOTEN BUITENVERTANDING

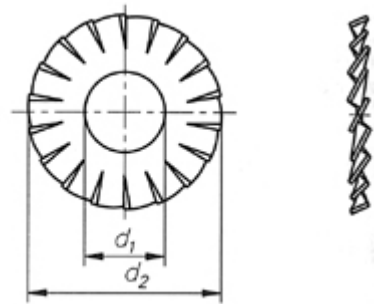

1*	M3	M4	M5	M5	M6	M7	M8	M8
	-	5/32	-	-	-	9/32	5/16	5/16
<b>d1</b>	3.2	4.3	5.1	5.3	6.4	7.4	8.2	8.4
<b>d2</b>	6	8	9	10	11	12.5	14	15
<b>S1</b>	0.4	0.5	0.5	0.6	0.7	0.8	0.8	0.8

1*	M8	M10	M11	M12	M14	M16	M18	M20	M22	M24	M27
	5/16	-	7/16	-	-	5/8	-	-	7/8	-	1 1/16
<b>d1</b>	8.4	10.5	11.5	13	15	17	19	21	23	25	28
<b>d2</b>	15	18	19.5	20.5	24	26	30	33	36	38	44
<b>S1</b>	0.8	0.9	0.9	1	1	1.2	1.4	1.4	1.5	1.5	1.6