


## DIN 7991 VERZONKEN SCHROEF MET BINNENZESKANT

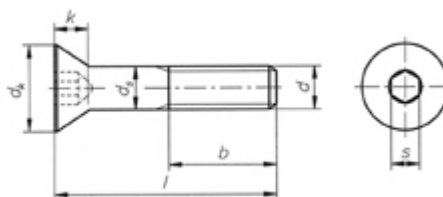

d	M1.4	M1.6	M2	M2.3	M2.5	M2.6	M3	M4	M5
p	0.3	0.35	0.4	0.4	0.45	0.45	0.5	0.7	0.8
b=L<125mm	-	-	-	-	-	-	12	14	16
b=L>125-200mm	-	-	-	-	-	-	-	-	-
dk	2.8	3.2	4	4.6	5	5.2	6	8	10
k	0.8	0.9	1.2	1.3	1.5	1.5	1.7	2.3	2.8
s	0.89	0.89	1.27	1.27	1.5	1.5	2	2.5	3
a	90°	90°	90°	90°	90°	90°	90°	90°	90°

d	M6	M8	M10	M12	M14	M16	M18	M20	M24
p	1	1.25	1.5	1.75	2	2	2.5	2.5	3
b=L<125mm	18	22	26	30	34	38	42	46	54
b=L>125-200mm	24	28	32	36	40	44	48	52	60
dk	12	16	20	24	27	30	33	36	39
k	3.3	4.4	5.5	6.5	7	7.5	8	8.5	14
s	4	5	6	8	10	10	12	12	14
a	90°	90°	90°	90°	90°	90°	90°	90°	60°